




SOUTH ELEVATION

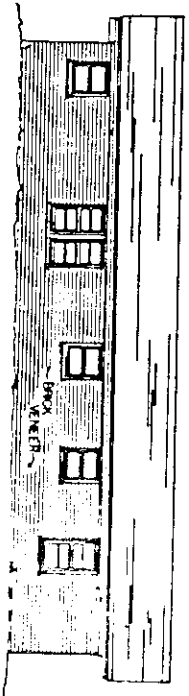

NORTH ELEVATION

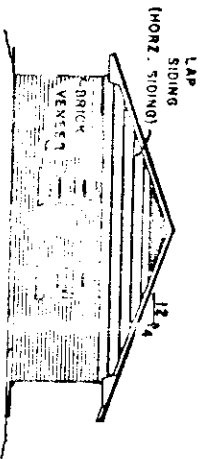

EAST ELEVATION

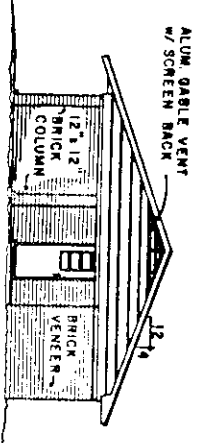

WEST ELEVATION




COOPERATIVE EXTENSION SERVICE
 AGRICULTURE AND HOME ECONOMICS

UNITED STATES DEPARTMENT OF AGRICULTURE

3-BR EFFICIENT BRICK VENEER

MISS '84 7235 SHEET 1 OF 3

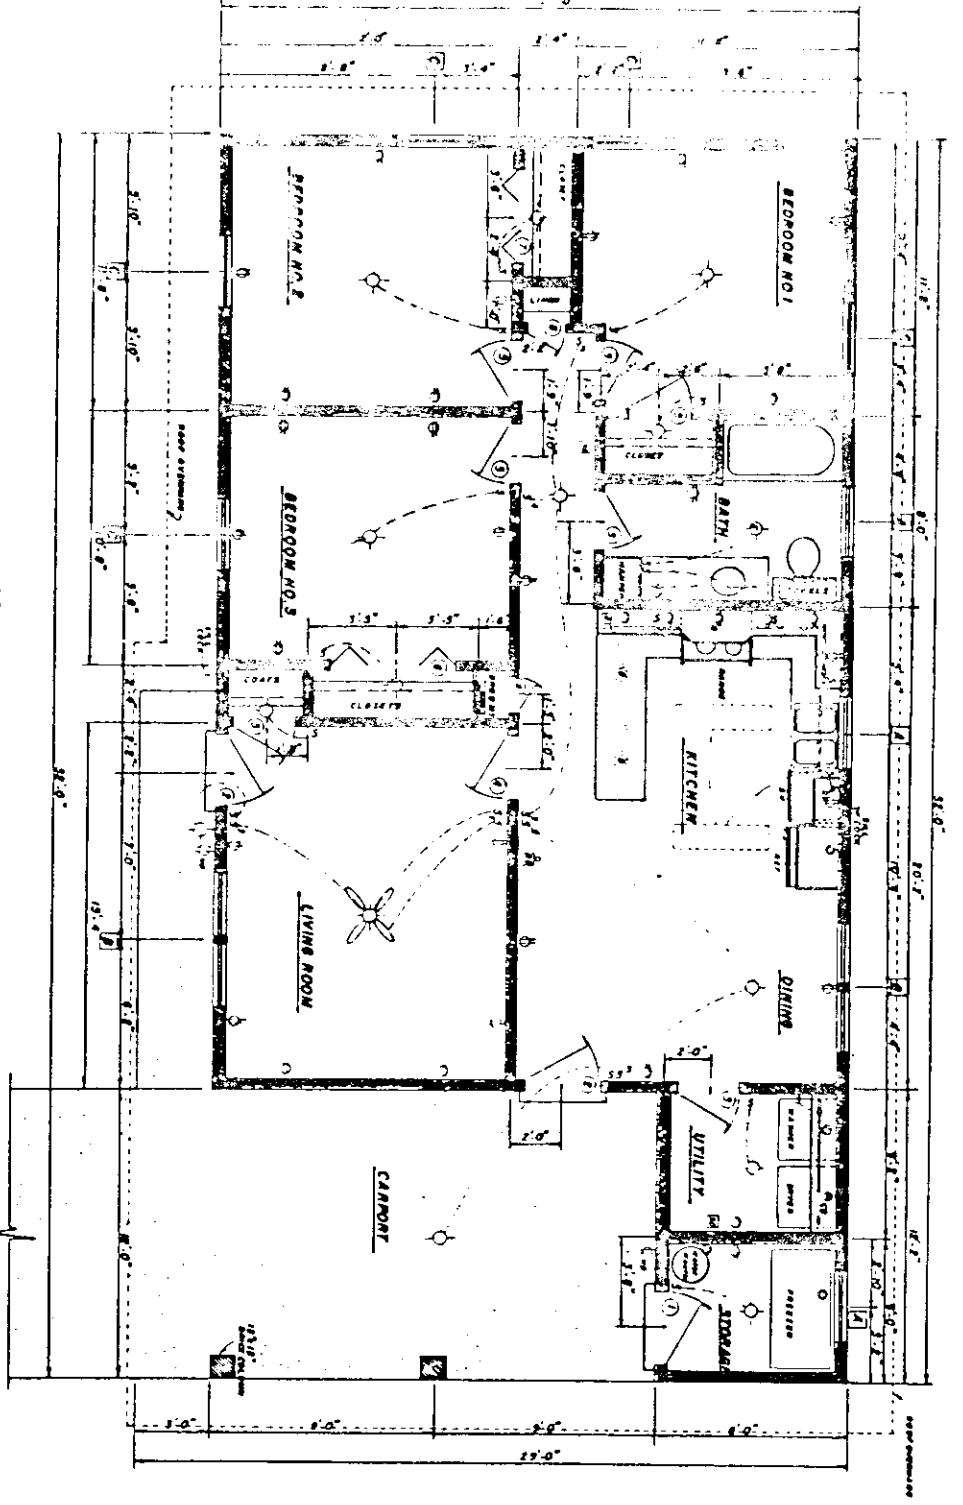

FLOOR PLAN

CONSTRUCTION CHECKLIST

1. CONSULT LOCAL BUILDING CODES AND LEADING AUTHORITIES BEFORE BEGINNING CONSTRUCTION (PARTICULARLY WITH 30 LB/FT² SNOW LOAD CRITERIA).
2. ANCHORING NAIL AND ANCHOR JOINTS.
3. USE 1 x 6 COLLAR BEAM AT EVERY RAFTER.
4. SHEATH WITH 1/2" PLYWOOD OR HIGH DENSITY FIBERBOARD OR USE DIAGONAL BRACING IN CORNERS.
5. USE EXTERIOR GRADED PLYWOOD WHEREVER IT MAY BE WETTED DURING OR AFTER CONSTRUCTION.
6. PRESSURE TREAT ALL WOOD WITH GROUND CONTACT AND PROVIDE OTHER NEEDED TERMITE CONTROL.
7. R VALUES DEPEND ON LOCAL CLIMATE AND FUEL COST.
8. PROVIDE 1.50 FT. OF ATTIC VENT OPENINGS FOR EACH 150 SQ. FT. OF CEILING.
9. WEATHERIZE ALL OPENINGS & JOINTS.

WINDOW SCHEDULE

SYMBOL	SIZE	DESCRIPTION	NO. REQ.
1	5'-0" x 5'-0"	SINGLE HUNG	3
2	5'-0" x 4'-6"	TWIN-SHGL HUNG	2
3	5'-0" x 4'-6"	SINGLE HUNG	2

ALL WINDOWS SHALL BE CERTIFIED DOUBLE GLAZED
 1/2" x 1/2" MINIMUM STAMPS

ELECTRICAL SCHEDULE

SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
1	SINGLE POLE SWITCH	1	DOOR BELL & CHimes (Incl. Bm. & Panel)	1	COND. VENTIL. LIGHT AND HEATER
2	TRIPLE WAY SWITCH	2	DOWNSWITCH OUTLET	2	BRACKET LIGHT
3	FOUR WAY SWITCH	3	CLOTHES DRYER OUTLET	3	RANGE OUTLET
4	DWELER SWITCH	4	ACCESSIBLE (Incl. 20 AMP) DOWNSWITCH PANEL W/ INSULATED OUTLET	4	SPECIAL COMPACT LIGHT
5	DWELER RECEPTACLE	5	FLUORESCENT STAIR IN SLOTTING CONC. ON EXTERIOR	5	SMOKE/CO2 BATTERY OPERATED DETECTOR
6	WATERPROOF OUTLET	6	LOOKING OUTLET	6	CEILING RAFFLE PAN W/ LIGHT AND ADJ. STREDS


DOOR SCHEDULE

SYMBOL	SIZE	DESCRIPTION	NO. REQ.	SYMBOL	SIZE	DESCRIPTION	NO. REQ.
1	5'-0" x 6'-8"	EXT. STEEL DOOR	1	3	5'-0" x 6'-8"	INT. PANEL DR.	8
2	5'-0" x 6'-8"	EXT. STEEL DOOR W/ WIND-LINING	2	4	5'-0" x 6'-8"	DI-FOLD - TOP PANEL	1
3	5'-0" x 6'-8"	INT. PANEL DR.	1	7	4'-0" x 6'-8"	" "	1
4	5'-0" x 6'-8"	" "	1	8	1'-6" x 6'-8"	INT. P-WEL DR.	2

ALL EXTERIOR DOORS SHALL BE STEEL CLAD W/ INSULATED GL.

COOPERATIVE EXTENSION SERVICE
 AGRICULTURE AND HOME ECONOMICS

UNITED STATES DEPARTMENT OF AGRICULTURE
 3-BR EFFICIENT PRICK VENEER
 MISS '84 7235 SHEET 2 OF 3

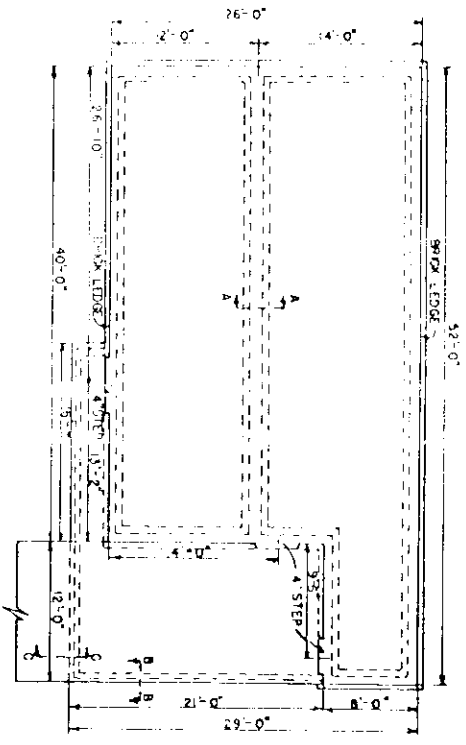

FOUNDATION PLAN




SECTION "A-A"



SECTION "B-B"



SECTION "C-C"

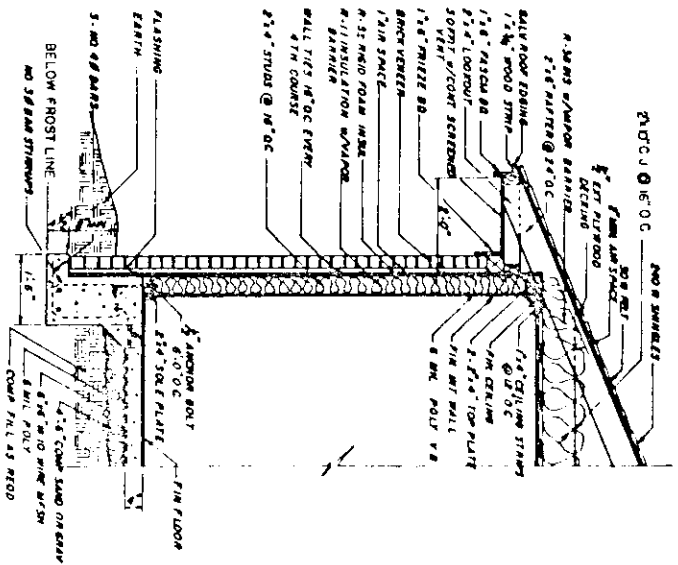

TYP. WALL SECTION



FOR OPTIMUM ENERGY EFFICIENCY AND LOWER UTILITY COST, SITE WITH ROOF RIDGE EAST TO WEST AS SHOWN.

COOPERATIVE EXTENSION SERVICE
 AGRICULTURE AND HOME ECONOMICS

UNITED STATES DEPARTMENT OF AGRICULTURE

3-BR EFFICIENT BRICK VENEER

MISS. 184 79233 SHEET 3 OF 3