
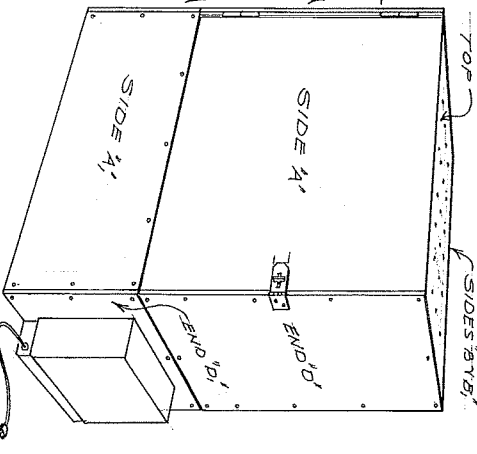
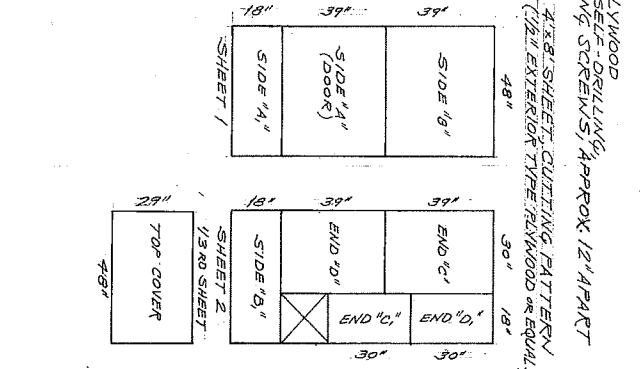


NOTE: SEAL ALL SURFACES AND EDGES OF PLYWOOD PANELS WITH COAT OF WOOD PRIMER AND COAT OF ENAMEL PAINT FOR DISINFECTON PURPOSES

ENDS 2x2

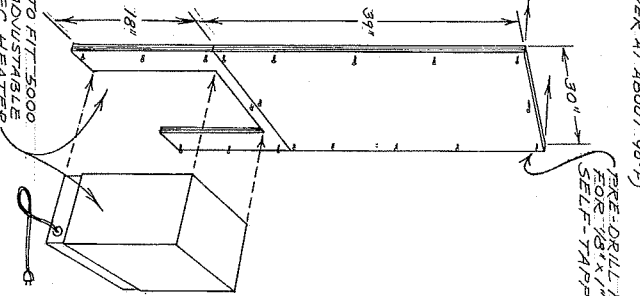

CUT OPENING TO FIT 5000 WATT 230 V ADJUSTABLE TOWERS, ELEC. HEATER

1/2" PLYWOOD TOP COVER (OPEN OR CLOSE MANUALLY TO OPERATE DRYER AT ABOUT 90°F)

PRE-DRILL PLYWOOD FOR 1/8" X 1/2" SELF-DRILLING SELF-TAPPING SCREWS, APPROX 12" APART

PORTABLE DRYER WARMER NO 871-7-5 FOR NEW BORN CALVES	
SCALE: 1/4" = 1'	APPROVED BY: DEYTER JOHNSON
DRAWN: 12/10/63	REVIEWED:
PREPARED BY: NDSU EXTENSION AGR. ENG. DEPT.	DESIGNED BY: MRS. KAY HARVEY MARSHALL N.D.
DRAWING NUMBER: SH. 1-871	